



**LIQUID WRAP**

- **Water Repellent When Properly Sealed**
- **Will Not Support Growth Of Bacteria**
- **Disinfects Easily**
- **Adhesive Resists Most Cleaners And Disinfectants**

**4' Pcs. Put-Ups**

Nominal Size	Part #	Wall Thickness	Bulk Box	Box 8x8	Box 6x6	Box 4x4	Available Colors	Lbs/ 10Pcs.
3/8"	L6N0.38	0.046"	250	90	50	30	2	0.9
1/2"	L6N0.50	0.046"	250	70	40	25	2	1.0
3/4"	L6N0.75	0.046"	125	50	30	15	2	1.8
1"	L6N1.00	0.046"	88	30	20	9	2	2.2
1 1/4"	L6N1.25	0.046"	63	20	10	6	2	2.6

**Stylish Fluid Protection For Wires & Cables**

Our new L6 Liquid Wrap semi-rigid wraparound sleeving is engineered from tough braided polyester, and laminated with a layer of strong Mylar sheeting. This combination provides a strong and lightweight solution for any application that requires protection from repeated exposure to the elements.


The wraparound construction, with 12% edge overlap makes installation easy over existing assemblies or harnesses, and the extra wide adhesive strip ensures a positive, aggressive seal against damage from exposure.

L6 is available in 4' pre-cut sticks in Black or White.

**Colors Available:**  
 2 = Black (BK) and White (WH).



**Cut Cleanly Scissor**

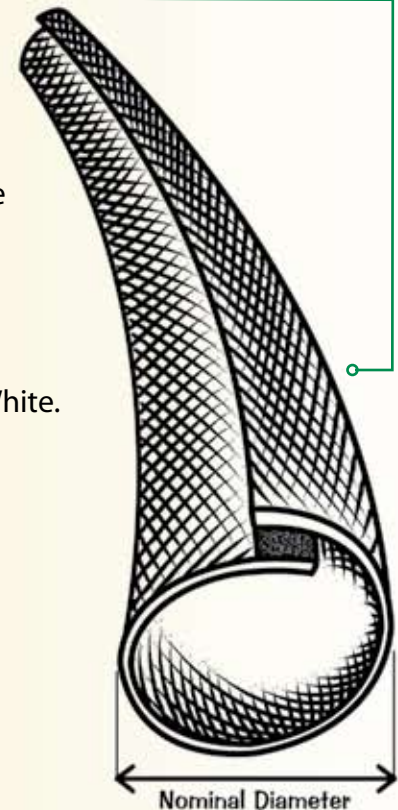

**L6 is ideal for marine and automotive wiring harnesses, and also for cable management in medical applications.**

<b>Material</b>	<b>Laminated Polyester</b>
<b>Grade</b>	<b>L6N</b>
<b>Monofilament Diameter</b>	<b>NA</b>





**LIQUID WRAP**



**Abrasion Resistance**  
**NA**



**Chemical Resistance**


1=No Effect    4=More Affected  
 2=Little Effect    5=Severely Affected  
 3=Affected

Aromatic Solvents	2
Aliphatic Solvents	1
Chlorinated Solvents	2
Weak Bases	1
Salts	1
Strong Bases	3
Salt Water <i>0-S-1926</i>	1
Hydraulic Fluid <i>MIL-H-5606</i>	1
Lube Oil <i>MIL-L-7808</i>	1
De-Icing Fluid <i>MIL-A-8243</i>	1
Strong Acids	3
Strong Oxidants	2
Esters/Keytones	1
UV Light	1
Petroleum	1
Fungus <i>ASTM G-21</i>	1
Halogen Free	Yes
RoHS	Yes
SVHC	None

**Melt Point**  
*ASTM D-2117*  
**482°F (250°C)**

**Maximum Continuous**  
*Mil-I-23053*  
**257°F (125°C)**

**Minimum Continuous**  
**-94°F (-70°C)**

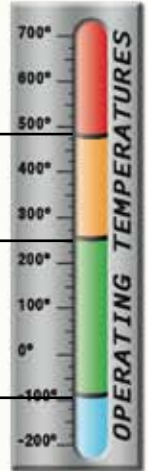

**PHYSICAL PROPERTIES**

Monofilament Diameter	NA
<i>ASTM D-204</i>	
Flammability Rating	
<i>FMVSS-302 Approved</i>	
Recommended Cutting	Scissor
Colors	2
Wall Thickness	.046
Tensile Strength (Yarn)	
<i>ASTM D-2256 Lbs</i>	
Specific Gravity <i>ASTM D-792</i>	NA
Moisture Absorption	NA
<i>% ASTM D-570</i>	
Hard Vacuum Data <i>ASTM E-595 at 10-5 torr</i>	
TML	
CVCM	
WVR	
Smoke D-Max	
<i>ASTM E-662</i>	
Outgassing	
Oxygen Index	
<i>ASTM D-2863</i>	

www.techflex.com